

Thank you for purchasing the Ideon Audio **Sigma Wave** USB isolator. This is a brief reference guide to quickly set up and use your device. You can download the full manual and the warranty terms from our web site at <https://ideonaudio.com/downloads>.

Front Panel

Power On / Off

To power on the device, lift the on/off (power) switch to the "ON" position located at the back of the device, as shown in the photo. A white LED light at the center of the front face will indicate that the device is on. The long white LED strip on the front faceplate indicates that the device is operating normally, and that the USB signal is passing through. To turn off the Sigma Wave, use the same on/off switch at the back of the unit and move it to the "OFF" position.




Long led strip indicating proper operation of the device.

Power On/Off led indicator.

Back Panel

Please complete all necessary connections (see pictures below) before connecting the power cord to the mains.

Once all connections are made, connect the power cord to the mains and switch the device on, as shown.

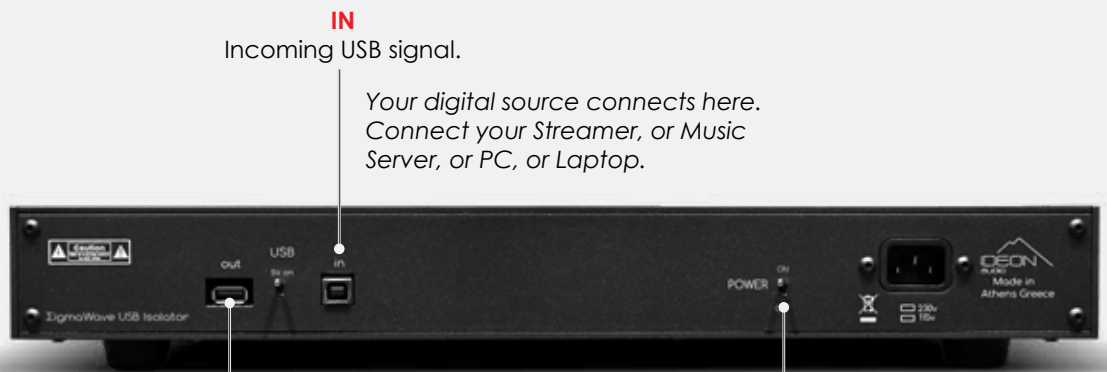

IN
Incoming USB signal.

Your digital source connects here. Connect your Streamer, or Music Server, or PC, or Laptop.

OUT
Outcoming USB signal.

Connect to a USB re-clocker or directly to a DAC with USB digital in.

Power ON / OFF.
This is the power switch of the devices to turn it on or off.

